2195 Drive
Enclosure
For CD/DVD and IDE/EIDE drives

Take your ATAPI CD-ROM/-R/-RW or DVD-ROM/-R/-RW drive beyond "the box." Or turn your IDE/EIDE hard drive into hi-performance external storage. Made from tough, yet lightweight components, 2195 Enclosures make installation and assembly a snap––literally.

Hi-Speed USB 2.0[1]
The USB 2.0 interface moves data as fast as 480 Mbps. Move hundreds of megabytes of data in mere seconds[2].

Easy Assembly & Setup
Complete, illustrated instructions, plus components that snap together make installation and setup quick and easy.

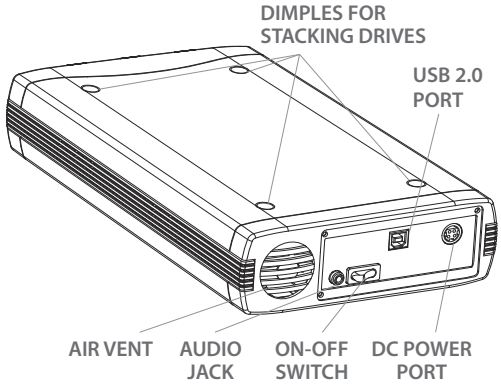

Fanless Design
The enclosure dissipates heat so efficiently it doesn't need a fan, allowing the drive to operate as quietly as possible.

Hot Pluggable
With your computer running you can: connect or disconnect the Drive for quick portability; turn the Drive off when you're not using it.

Plug & Play
Once your drive is installed, in most cases you simply need to connect the data cable and plug in the AC adapter/power cord.

48-bit Logical Block Addressing
With 48-bit LBA, the 2195 supports the highest capacity IDE/EIDE drives available today––and for years to come.

Specifications
- Interface: Hi-Speed USB 2.0
- Interface transfer rate (max.): 480 Mbps (60 Megabytes/second)
- Dimensions:
  - 6.7" x 2.16" x 10";
  - 170 x 55 x 254 mm
- Weight: 1.32 lbs; 600 g

System Requirements
- PC with minimum 233 MHz Pentium or equivalent (Celeron, AMD etc.) running Windows XP, 2000, Me, or 98SE
- Mac or Power Mac running Mac OS 9 or Mac OS X
- Available USB port

Package Contents
- AcomData 2195 Enclosure
- USB cable
- USB 2.0 Driver CD (needed for Windows 98SE only)
- AC adapter and power cord
- Printed User's Guide
- Warranty Registration Card

One Year Limited Warranty

acomdata™
www.acomdata.com

[1] If using a USB 1.1 connection, data transfers will be at USB 1.1 speeds (up to 12 Mbps).

[2] Data transfer speeds will depend on the type of device installed (e.g. CD drive, DVD drive, hard drive) and the device's own specifications.

©2005 AcomData. All rights reserved. The AcomData name and logo are registered trademarks of AcomData. All other trademarks and logos are the property of their respective owners. Prices and specifications are subject to change without notice.